




Supplementary Maintenance Instruction

LP Sustained Sabre/Odyssey Emergency Batters

Sabre/Odyssey Batters – Battery and LED Replacement

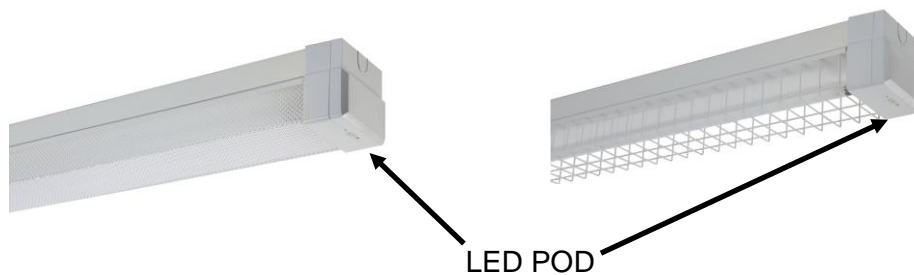

LED POD location on batten



LED POD assembly screws



LED Head and Batteries

SPARES

LED Head LP Batten: P/N: 8050215

LED Head LP Batten (-4HR Luminaires only) P/N:1100641

1 x Lithium LP Cell 3.3V 3200mAh P/N: 1550050

2 x Batteries for -4HR Luminaires)

BATTERY REPLACEMENT

1. Remove the LED POD assembly screws.
2. Remove the POD cover.
3. Disconnect battery from the interface PCB.
4. Install new batteries as required.
5. Reinstall the POD cover.

Battery replacement can be performed without interrupting power to the fitting

LED REPLACEMENT

1. Remove the batten diffuser or wire guard.
2. Remove the lamp tubes.
3. Remove the batten cover plate.
4. Disconnect the LED cable from the Lifelight Pack.
5. Remove the LED POD cover screws.
6. Remove the LED POD cover.
7. Remove the LED head and cable.
8. Install the new LED and cable.
9. Reinstall the POD cover.

For lamp head replacement, power MUST be removed from the fitting

Important:

It is illegal for anyone, except for a licensed electrician to install or maintain this product. Before installation, ensure that the electricity supply has been switched off and isolated. Installation must be carried out in accordance with the relevant Australian and International Standards.