

## CLEVERTRONICS LP LED SUPALITE



## PRODUCT INFORMATION

Part Number	CFLLED-DALI
MIC	AUE02210010102
Description	LP Premium Supalite LED Flood Unit, Surface Mounted Emergency Light
Construction	Polycarbonate
Mounting	Surface Mounted, hard wired via terminal blocks
Dimensions L x W x H	Main enclosure - 282mm (L) x 64mm (W) x 137mm (H) Total height including LED Heads 225mm
Weight	1.3kg
Operating Mode	Non-maintained
Testing System	DALI Registered
Battery	Lithium Iron Phosphate, 3.2V 6400mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	2 x LED Heads (adjustable), 185lm per lamp head
Operating Voltage	240V AC; 50Hz
Power Consumption	0.4 Watts (Standby), 2.2 Watts (Max)
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C <sub>0</sub> =N/A C <sub>90</sub> =N/A

## REPLACEMENT PARTS


PART NUMBER	DESCRIPTION
1550230	BATT: LP 3.2V 6400mAh 200mm lead Brkt.
1100955	LED Flood Lamp Head Assembly, Cable & Connector, Right
1100954	LED Flood Lamp Head Assembly, Cable & Connector, Left
8002911	PCA: CFLLED #CT10142-L9
8003060	PCA-DALI #CT10629-Ax

*The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order*

## Spacing Guidance

### Polar curve for a single LED lamp head

Luminous emittance 1:

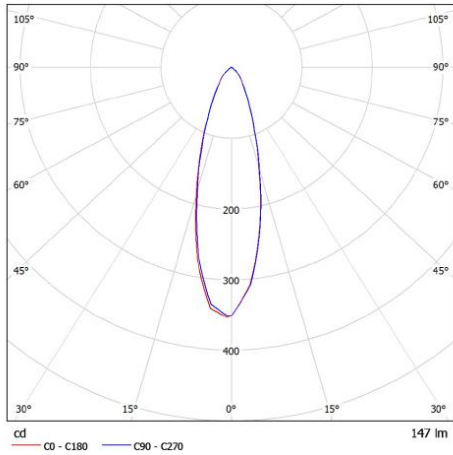

**Isolux plot and value table for a 10m x 10m area serviced by a Supalite with each LED lamp head tilted down 30°, rolled out 30°. The Supalite mounted on the wall at a height of 3m (values in lux).**

