


## CLEVERTRONICS LP SWINGBLADE LED EXIT, BLACK (DALI)

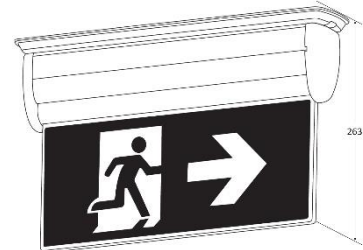

### PRODUCT INFORMATION

Catalogue Number	CSBLED-DALI-BLK
Description	LP Premium Swingblade Emergency Exit, Black
Construction	Metal frame, Black End Caps with Acrylic & Polycarbonate Diffuser
Mounting	Surface Mount, Wall or Ceiling on a slide connect bracket – Single & Double Sided “NOTE: If product is suspended below the ceiling or mounted on a metal surface the Swingblade bracket cover plate accessory (P/N: 2740105) is required to cover the mains terminals.”
Dimensions L x W x H	See diagram above
Weight	2.6kg
Operating Mode	Maintained
Testing System	DALI compatible
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	All directional inserts included in the box
Lamp(s)	24 x High Intensity LED, Surface Mounted onto a replaceable lamp bar - 100,000hour
Operating Voltage	240V AC; 50Hz
Power Consumption	3.8 Watts (Standby), 6.2 Watts during first 16hr charge
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C <sub>0</sub> =D10 C <sub>90</sub> =E3.2
Viewing Distance	24m

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550050	Battery, LP 3.2V 3200mAh 70mm lead, no Bracket
8002345	PCA:Lithium U/BLADE Driver. #CT10164-L4.
8002175	PCA:24DLED UB LED Strip, #CT10156-D2
8002200	PCA:DALI Node, #CT10410-A3

DALI €M

**LP™ PREMIUM**  
LITHIUM BATTERY RANGE

Version: January 2017-1  
[www.clevertronics.com.au](http://www.clevertronics.com.au)