



CWFLED-BLK

CLEVERTRONICS LP LED WEATHERPROOF SUPALITE, BLACK



PRODUCT INFORMATION

| | |
|--------------------------|---|
| Part Number | CWFLED-BLK |
| MIC | AUE02320040001 |
| Description | LP Premium LED Weatherproof Supalite Flood Unit, Surface Mounted Emergency Light, Enabled with Clevertest plus, Black |
| Construction | Polycarbonate |
| Mounting | Surface wall mount (hard wired supply connection) |
| Dimensions | Main enclosure - 380mm (W) x 190mm (H) x 130mm (D) Total height including LED Heads 310mm. |
| Weight | 3.6 kg |
| Operating Mode | Non-maintained |
| Testing System | Clevertest Plus Enabled (Not activated by default) |
| Battery | Lithium Iron Phosphate, 6.4V 3200mAh |
| Charging Method | Intelligent Current Limited Constant Voltage |
| Lamp(s) | 2 x LED Heads (adjustable), 600lm per lamp head |
| Operating Voltage | 240V AC; 50Hz |
| Power Consumption | 1.0W (Standby), 5.4W (Max) |
| IP Rating | IP65 |
| Operating Temperature | 0°C to 40°C |
| AS2293 Classification | C ₀ =N/A C ₉₀ =N/A |
| Applicable Standards | AS/NZS3820, CISPR15, AS/NZS2293.3 |
| Compliance Marking (RCM) | |

REPLACEMENT PARTS

| PART NUMBER | DESCRIPTION |
|---------------------------------------|-----------------|
| 1550290 | Battery x 2 |
| AUM02370210001 CCPLED-18V625C-CKIT | EM Driver |
| 1100551 | WP Led Head x 2 |

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order




CWFLED-BLK

CLEVERTRONICS LP LED WEATHERPROOF SUPALITE, BLACK


Isolux plot and value table for a 30m x 30m area serviced by a Weatherproof Supalite with each LED lamp head tilted down 30°, rolled out 30°. The Weatherproof Supalite mounted on the wall at a height of 3m and 6m (values in lux).

CWFLED@3m

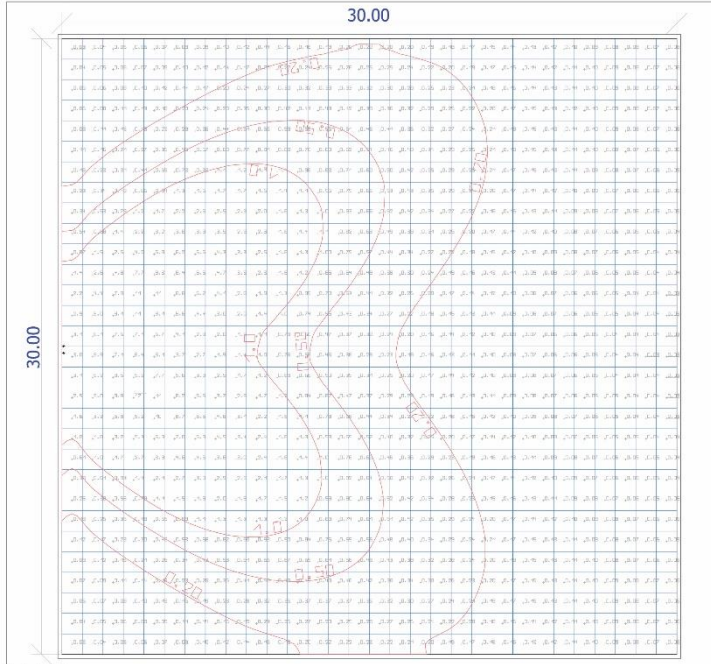

Scale: 1:200

CWFLED@6m

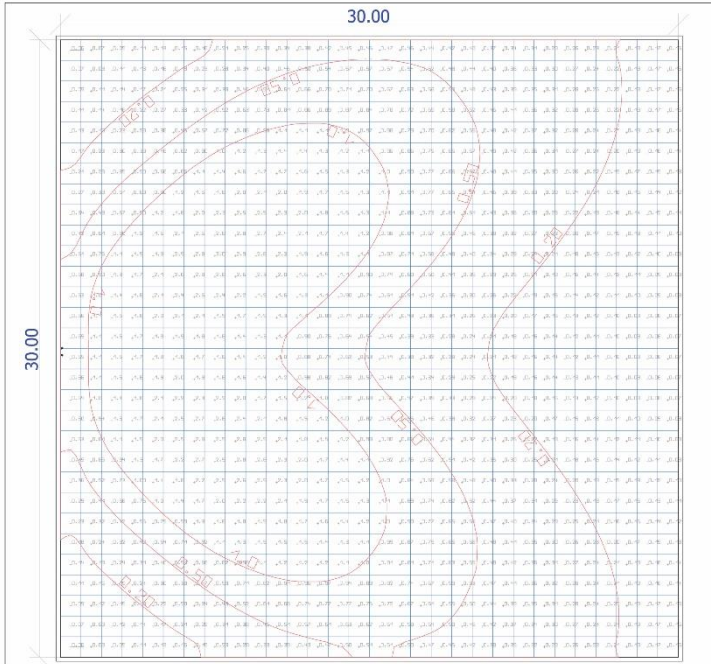

Scale: 1:200