



## CWFLED-HV

CLEVERTRONICS LP LED WEATHERPROOF SUPALITE



PRODUCT INFORMATION	
Part Number	CWFLED-HV
MIC	AUE02820010001
Description	LP Premium LED Weatherproof Supalite Flood Unit, Surface Mounted Emergency Light
Construction	Polycarbonate
Mounting	Surface wall mount (hard wired supply connection)
Dimensions	Main enclosure - 380mm (W) x 190mm (H) x 130mm (D) Total height including LED Heads 310mm.
Weight	3.6 kg
Operating Mode	Non-maintained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Iron Phosphate, 6.4V 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	2 x LED Heads (adjustable), 600lm per lamp head
Operating Voltage	240V AC; 50Hz
Power Consumption	1.2W (Standby), 5.4W (Max)
IP Rating	IP65
Operating Temperature	0°C to 40°C
AS2293 Classification	C <sub>0</sub> =N/A C <sub>90</sub> =N/A
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

REPLACEMENT PARTS	
PART NUMBER	DESCRIPTION
1550290	BATT:LP 6.4V 3.2Ah.200mm lead.Stick.Brkt (QTY 2)
1100550	WP Led Head, c/w Led's & Loom, Gland (QTY 2)
AUM02870350001 CCPLED-18V625C-CKIT-HV	LED Power Pack, 18V 625mA, IP Loom, LP, HV (incl. Hive node)
8003193	PCA: RF Node CT10678-A9 Int Antenna Horizontal


The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order



# CWFLED-HV CLEVERTRONICS LP LED WEATHERPROOF SUPALITE


Isolux plot and value table for a 30m x 30m area serviced by a Weatherproof Supalite with each LED lamp head tilted down 30°, rolled out 30°. The Weatherproof Supalite mounted on the wall at a height of 3m and 6m (values in lux).

CWFLED@3m

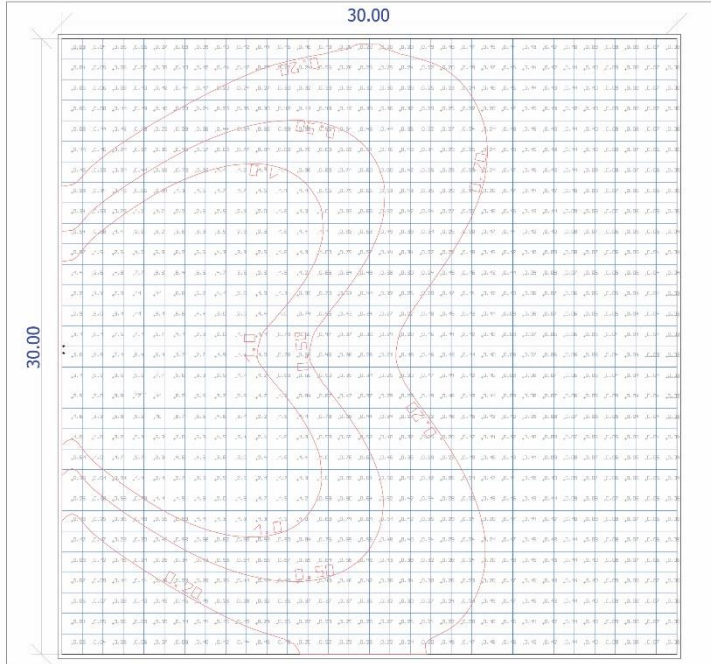

Scale: 1:200

CWFLED@6m

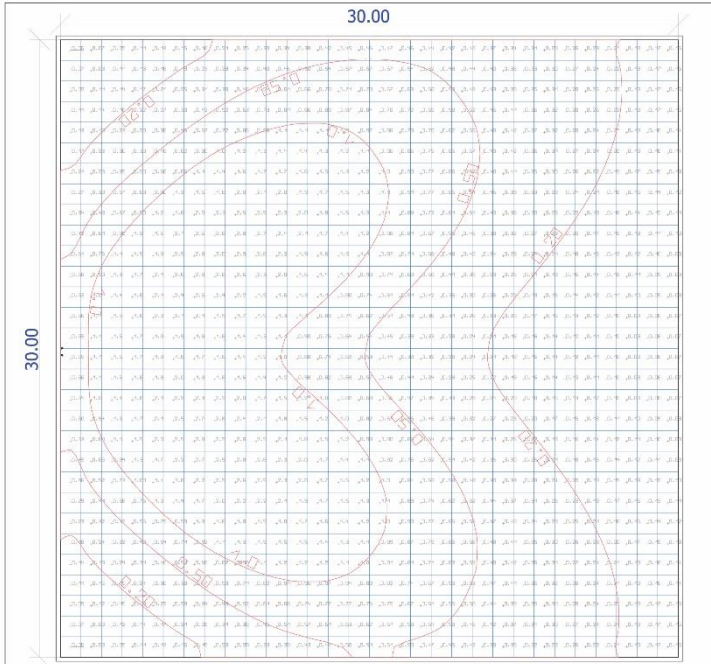

Scale: 1:200