

LIFELIGHT PRO SURFACE MOUNT EMERGENCY



Premium LED Emergency Light

The Lifelight Pro Surface Mount provides a D80 emergency classification in a small and sleek polycarbonate housing that is easy to install.

With market-leading lithium battery technology and energy efficient LEDs, the Lifelight Pro Surface Mount delivers lower maintenance and energy costs.



Applications

- | | | | |
|--|------------------|---|----------------|
|  | Office Buildings |  | Showrooms |
|  | Galleries |  | Retail Outlets |
|  | Apartments |  | Theatres |

LP LITHIUM IRON PHOSPHATE
PREMIUM
PREMIUM PROJECT PERFORMANCE

L10 LITHIUM NANOPHOSPHATE®
OPTIMUM
NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

Features and Benefits

- AS/NZS 2293.3 compliant
- D80 emergency classification
- Low 0.4W power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black as standard with other colours on request



LIFELIGHT PRO SURFACE MOUNT EMERGENCY

ORDERING INFORMATION		LP	L10
TEST OPTIONS / PART #	Standard - White	CLIFE-PRO-SM	LLIFE-PRO-SM
	Standard - Black	CLIFE-PRO-SM-BLK	LLIFE-PRO-SM-BLK
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-PRO-SM-DALI	LLIFE-PRO-SM-DALI
	Zoneworks® XT Hive	CLIFE-PRO-SM-HV	LLIFE-PRO-SM-HV
Carton Quantity	10 Pieces	10 Pieces	
Weight - Single	0.7kg	0.7kg	
Dimensions (L x W x H)	242mm x 125mm x 48mm		

POWER, LAMPS AND BATTERY	LP	L10
Power Consumption (Standby / Max)	0.4W / 2.7W	
Lamp(s)	2 x LED	
Battery	Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 6400mAh	3.3V / 5000mAh
Charging Method	Intelligent Current Limited Constant Voltage	


TECHNICAL SPECIFICATIONS	CLASSIFICATION	
	LP	L10
Operating Mode	Non-Maintained	
Voltage (V) Frequency (Hz)	220-240V (50Hz)	
Operating Temperature	1°C to 40°C	
IP Rating (IP)	IP20	
	C0	D80
	C90	D80

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

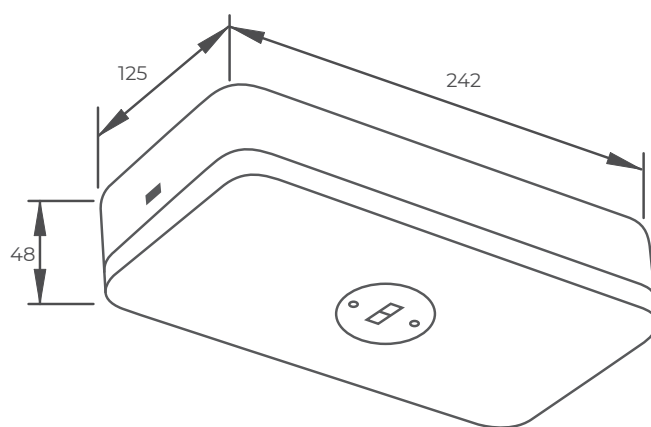

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products. All features and specifications are subject to change without prior notice.
 _PRODUCT SHEETS – ANZ Lifelight Pro Surface Mount 04OCT22

