

# LIFELIGHT SURFACE MOUNT EMERGENCY



## LED Surface Mount Emergency Light

The Lifelight Surface Mount provides a D40 emergency classification in a small and sleek polycarbonate housing that is easy to install.

With market-leading lithium battery technology and energy efficient LEDs, the Lifelight Surface Mount delivers low maintenance and energy costs.



### Applications

-  Office Buildings
-  Apartments
-  Schools
-  Retail outlets

### Features and Benefits

- AS/NZS 2293.3 compliant
- D40 emergency classification
- Low power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or black as standard with other colours available on request (LP & L10 only)



**TRADE**  
SERIES  
THE TRADES CHOICE

**LP** LITHIUM IRON PHOSPHATE  
PREMIUM  
PREMIUM PROJECT PERFORMANCE

**L10** LITHIUM NANOPHOSPHATE®  
OPTIMUM  
NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

# LIFELIGHT SURFACE MOUNT EMERGENCY

ORDERING INFORMATION		TS	LP	L10
TEST OPTIONS / PART #	Standard - White	ELIFE-X-LI-SM	CLIFE-SM	LLIFE-SM
	Standard - Black	-	CLIFE-SM-BLK	LLIFE-SM-BLK
	Clevertest Plus System Compatible	No	Yes	
	DALI	-	CLIFE-SM-DALI	LLIFE-SM-DALI
	Zoneworks® XT Hive	-	CLIFE-SM-HV	LLIFE-SM-HV
Carton Quantity	10 Pieces			
Weight - Single	0.6kg			
Dimensions (L x W x H)	242mm x 125mm x 48mm			

POWER, LAMPS AND BATTERY	TS	LP	L10
Power Consumption (Standby / Max)	0.4W / 1.3W	1.0W / 4.2W	1.0W / 4.2W
Lamp(s)	1 x LED		
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		


TECHNICAL SPECIFICATIONS	
Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

CLASSIFICATION	TS	LP	L10
C0	D40	D40	D40
C90	D40	D40	D40

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:  
<https://clevertronics.com.au/spacing-tables/>

\*Warranty information located at:  
<https://clevertronics.com.au/warranty-statement/>

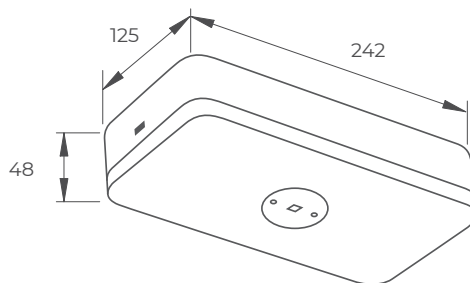

Dimensions (mm)

**clevertronics.co.nz**  
**clevertronics.com.au**

1 Caribbean Drive, Scoresby VIC 3179  
P +61 3 9559 2700 F +61 3 9559 2799 E [info@clevertronics.com.au](mailto:info@clevertronics.com.au)

Clevertronics is committed to continuously improving its products.  
All features and specifications are subject to change without prior notice.  
\_PRODUCT SHEETS – ANZ Lifelight Surface Mount Emergency 04OCT22

