

# LOW TEMPERATURE EXIT




## Suitable for Cool Room and Freezer Applications

The Low Temperature Exit range is designed for cool room and freezer applications where the temperature can drop to  $-40^{\circ}\text{C}$ .


Now featuring Lithium Nanophosphate battery technology, the 24m viewing distance range is available in universal or wall mount as a one box solution with all directional decals to suit any application.

### Applications

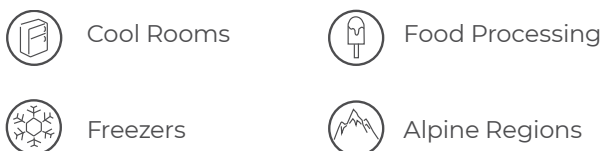

### Features and Benefits

- AS/NZS 2293.3 compliant
- $-25^{\circ}\text{C}$  to  $-40^{\circ}\text{C}$  options
- Lithium Nanophosphate® battery
- IP66/67
- Clevertest Plus System compatible

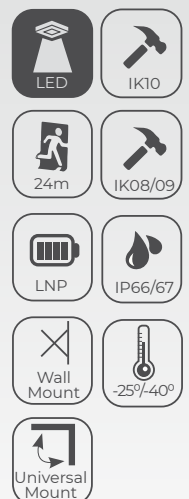

# LOW TEMPERATURE EXIT

ORDERING INFORMATION		L10		
Viewing Distance / Product Configuration	24m Universal Mount Single or Double Sided Integral Gear <sup>1</sup>	24m Wall Mount Single Sided Integral Gear <sup>2</sup>	24m Wall Mount Single Sided Remote Enclosed Gear <sup>2</sup> <sup>3</sup>	
Operating Temperature	-25°C to 40°C			-40°C to 40°C (EXIT) 0°C to +40°C (REMOTE CONTROL GEAR)
PART #	Standard	LWEPRO-FZR	LWELED-WM-FZR	LWELED-WM-IPREM
	Zoneworks® XT Hive	LWEPRO-FZR-HV	LWELED-WM-FZR-HV	LWELED-WM-HV-IPREM
Clevertest Plus System Compatible	No	No	Yes	
Directional Options	All Directional Inserts Included (Excluding Theatre Versions)			
Carton Quantity	1			
Weight - Single (Carton)	3.4kg	2.7kg	4.8kg	
Dimensions ( L X W X H ) - Exit	410mm x 100mm x 272mm	380mm x 190mm x 130mm	380mm x 190mm x 130mm	
Dimensions ( L X W X H ) - Remote Enclosed Gear	-	-	380mm x 190mm x 130mm	

POWER, LAMPS AND BATTERY		L10		
Power Consumption (Standby / Max)	1.4W / 3.5W	2.8W / 3.8W	3.6W / 4.6W	
Lamp(s)	100,000 Hours LED			
Battery	Lithium Nanophosphate®			
Voltage (V) / Capacity (mAh)	3.3V / 5000mAh		3.3V / 2500mAh	
Charging Method	Intelligent Current Limited Constant Voltage			

TECHNICAL SPECIFICATIONS			
Operating Mode	Maintained		
Voltage (V) (Frequency (Hz))	240V AC (50HZ)		
Construction - Body / Diffuser	Exit: PC/ABS Body with PC Diffuser / Enclosure PC Clear Cover, Glass Reinforced Nylon Base	PC Clear Cover, PC Base	PC Clear Cover, PC Base
Ingress Protection Rating (IP)	IP66/67		
Impact Rating (IK)	IK10	IK08 (Side Surface) / IK09 (Front Surface)	


CLASSIFICATION		L10		
C0	D2.5	E1.6	E1.6	
C90	E4	E1.6	E1.6	

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
D2.5	5.8	5.8	5.7	5.6	5.3	0.0	0.0	0.0	N/A
E4	6.2	6.6	6.9	7.1	7.3	7.4	7.4	0.0	0.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

\*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

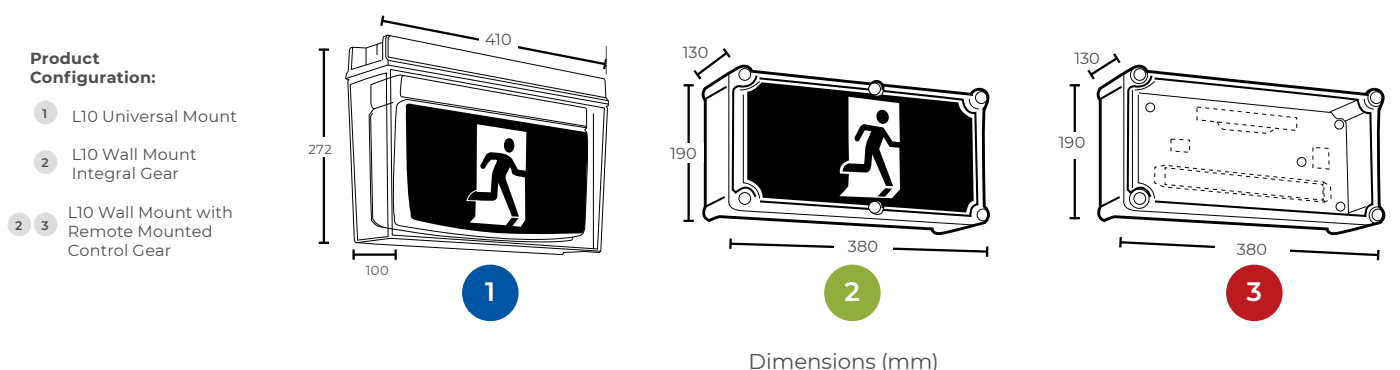

**clevertronics.co.nz**  
**clevertronics.com.au**

1 Caribbean Drive, Scoresby VIC 3179  
P +61 3 9559 2700 F +61 3 9559 2799 E [info@clevertronics.com.au](mailto:info@clevertronics.com.au)

Clevertronics is committed to continuously improving its products. All features and specifications are subject to change without prior notice. \_PRODUCT SHEETS – ANZ Low Temperature 04OCT22

