

BARE EMERGENCY TWIN LIFELIGHT PRO



Steel Batten Range at the Right Price

The Bare Emergency Twin Lifelight Pro range has been designed for application where a high output non-maintained emergency light is required.


The fitting is the ideal shape to cover paint lines of a traditional batten, and its solid construction makes it suitable for suspending.

Applications

- | | |
|---|--|
|  Warehouses |  Sports Halls |
|  Factories |  Exhibition Centres |
|  Hangers | |

LP LITHIUM IRON PHOSPHATE
PREMIUM
PREMIUM PROJECT PERFORMANCE

L10 LITHIUM NANOPHOSPHATE[®]
OPTIMUM
NOTHING ELSE COMPETES WITH NANOPHOSPHATE[®]

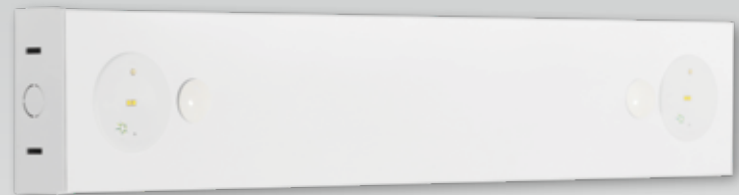

Features and Benefits

- AS/NZS 2293.3 compliant
- Lithium Iron Phosphate or Nanophosphate[®] battery
- Zoneworks[®] XT HIVE or DALI test options in LP Premium and L10
- Clevertest Plus System compatible
- D160 emergency classification
- White as standard with black available upon request (LP & L10 only)



BARE EMERGENCY TWIN LIFELIGHT PRO 600MM


ORDERING INFORMATION		LP	L10
Nominal Size		600mm	600mm
TEST OPTIONS / PART#	Standard	CLIFE-2PRO-SMS-600	LLIFE-2PRO-SMS-1200
	Motion Sensors	No	
	CTP System Compatible	Yes	
	DALI	CLIFE-2PRO-SMS-DALI-600	LLIFE-2PRO-SMS-DALI-600
	Zoneworks® XT HIVE	CLIFE-2PRO-SMS-HV-600	LLIFE-2PRO-SMS-HV-600
Carton Quantity	1		
Weight - Single (Carton)	1.5kg	1.6kg	
Dimensions (L X W x H)	611mm x 111mm x 54mm		

TECHNICAL SPECIFICATIONS		LP	L10
Construction - Base		Powder Coated Steel	
Voltage (V) (Frequency (Hz))		220-240V (50Hz)	
Power Consumption ♦ (Standby / Max)		0.8W / 5.4W	0.8W / 5.4W
Lamp		Twin LED Lifelight Pro (Lifetime Warranty on the Lamp Head and Loom Assembly)	
Operating Temperature		1°C to 40°C	

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		LP	L10
Operating Mode		Non-Maintained	
Battery Configuration		Integral	
Battery Type		Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage / Capacity (mAh)		2 x 3.2V / 6400mAh	2 x 3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage	

CLASSIFICATION		LP	L10
C0		D160	
C90		D160	

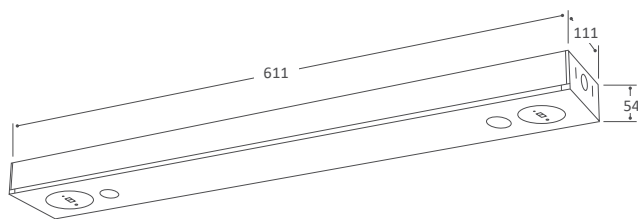

600mm/2ft Dimensions (mm)

BARE EMERGENCY TWIN LIFELIGHT PRO 1200MM


ORDERING INFORMATION	LP	L10
Nominal Size	1200mm	1200mm
TEST OPTIONS / PART#	Standard	CLI FE-2PRO-SMS-1200
	Motion Sensors	No
	CTP System Compatible	Yes
	DALI	CLI FE-2PRO-SMS-DALI-1200
	Zoneworks® XT HIVE	CLIFE-2PRO-SMS-HV-1200
Carton Quantity	1	
Weight - Single (Carton)	2.2kg	2.3kg
Dimensions (L X W x H)	1219mm x 111mm x 54mm	

TECHNICAL SPECIFICATIONS	LP	L10
Construction - Base	Powder Coated Steel	
Voltage (V) (Frequency (Hz))	220-240V (50Hz)	
Power Consumption ♦ (Standby / Max)	0.8W / 5.4W	0.8W / 5.4W
Lamp	Twin LED Lifelight Pro (Lifetime Warranty on the Lamp Head and Loom Assembly)	
Operating Temperature	1°C to 40°C	

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	LP	L10
Operating Mode	Non-Maintained	
Battery Configuration	Integral	
Battery Type	Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage / Capacity (mAh)	2 x 3.2V / 6400mAh	2 x 3.3V / 5000mAh
Charging Method	Intelligent Current Limited Constant Voltage	

CLASSIFICATION	LP	L10
C0	D160	
C90	D160	

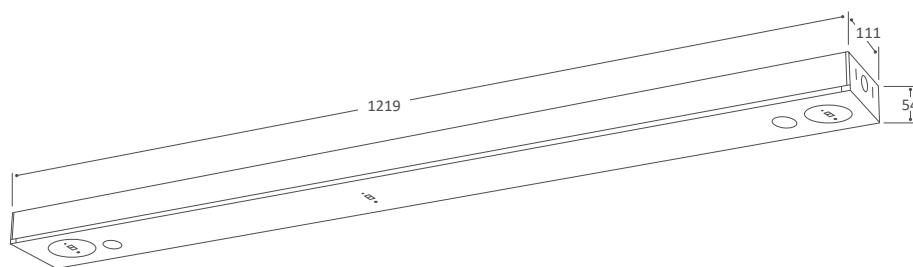

BARE EMERGENCY TWIN LIFELIGHT PRO

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)


Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D160	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	33.0	38.5	40.2	41.4	42.5

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

600mm/2ft

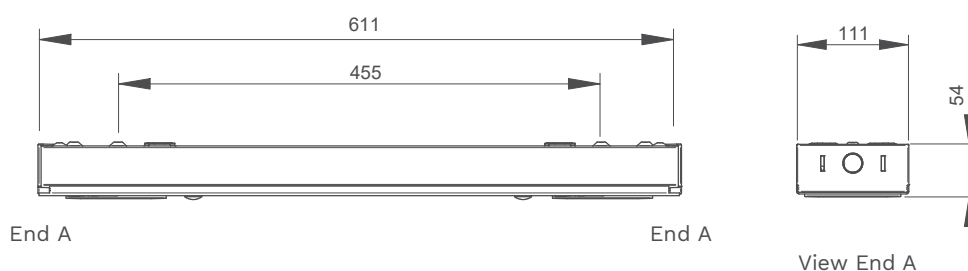

1200mm/4ft

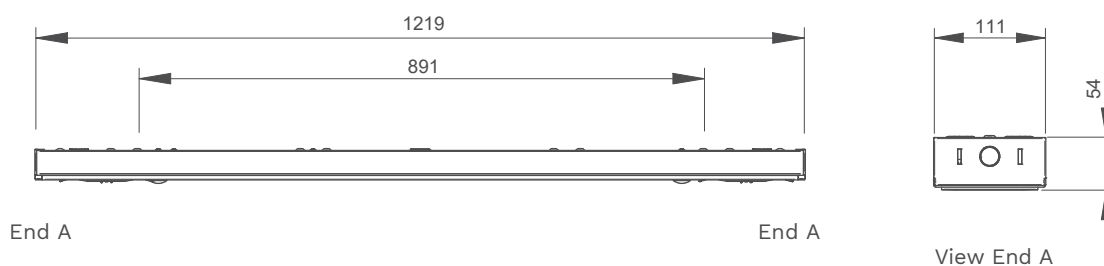

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
_PRODUCT SHEETS – ANZ Twin Lifelight Pro Bare Emergency 04OCT22

