

ULTRABLADE PRO ROD SUSPENDED EXIT



Rod Suspended Architectural Blade Exit

The Ultrablade Pro Rod Suspended Exit is ideal for high ceiling applications where a sophisticated premium outcome is required.

Each directional decal is scratch and fingerprint resistant to ensure a clean and consistent outcome.

The 1.5m rods can be customised to suit lower ceiling heights where required.



Applications



Office Buildings



Shopping Centres



Galleries



Retail Outlets



Theatres



Apartments

L10 LITHIUM NANOPHOSPHATE[®]
OPTIMUM
NOTHING ELSE COMPETES WITH NANOPHOSPHATE[®]

Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.4W standby power consumption
- Steel rods supplied with fitting
- All directional decals in one box
- Lithium Nanophosphate[®] battery
- Clevertest Plus System compatible
- Theatre version available



ULTRABLADE PRO ROD SUSPENDED EXIT

		L10	
ORDERING INFORMATION		ROD SUSPENDED (SURFACE MOUNT)	ROD SUSPENDED (RECESSED)
TEST OPTIONS / PART #	Standard	LUBPRO-SM-RS	LUBPRO-RS
	Clevertest Plus System Compatible	Yes	
	DALI	LUBPRO-SM-RS-DALI	LUBPRO-RS-DALI
	Zoneworks® XT Hive	LUBPRO-SM-RS-HV	LUBPRO-RS-HV
Carton Quantity	1		
Weight - Single (Carton)	1.5kg		
Dimensions (L x W x H)	Blade Assembly: 317mm x 8.7mm x 157mm Ceiling Mount Control Gear Enclosure: 360mm x 47mm x 72mm Rod Length: 1500mm	Blade Assembly: 317mm x 8.7mm x 157mm Recessed Control Gear Enclosure: 347mm x 48mm x 65mm Cover Plate: 385mm x 67mm Rod Length: 1500mm	
Directional Options	All Directional Inserts Included		

POWER, LAMPS AND BATTERY		L10
Power Consumption (Standby / Max)	1.4W / 3.7W	
Lamp(s)	100,000 Hours	
Battery	Lithium Nanophosphate®	
Voltage (V) / Capacity (mAh)	3.3V / 2500mAh	
Charging Method	Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) (Frequency (Hz))	220-240V (50Hz)
Construction	PC/ABS Body with PC Diffuser
Viewing Distance	24m
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP20


CLASSIFICATION	L10	
	SURFACE MOUNT	RECESSED
C0	E5	E5
C90	E5	E5

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E5	6.6	7.0	7.4	7.7	7.9	8.1	8.2	8.2	8.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux.
Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1.
Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

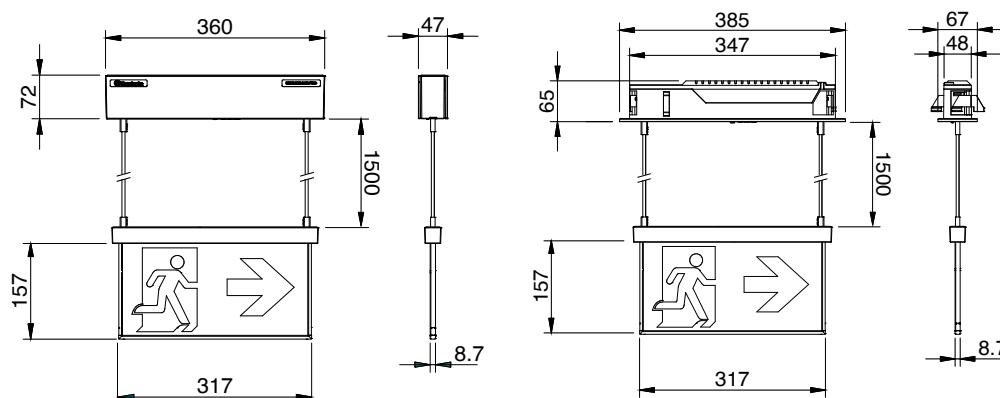

Product Configuration:

- 1 Rod Suspended (Surface Mount)
- 2 Rod Suspended (Recessed)

1

Ceiling hole cut-out = 350mm x 48mm

2

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
_PRODUCT SHEETS – ANZ Ultrablade Pro Rod Suspended 04OCT22

