

CLEVERTRONICS L10 LED WEATHERPROOF SUPALITE




PRODUCT INFORMATION

Part Number	LWFLED-DALI-BLK
Description	L10 Lithium Nanophosphate LED Weatherproof Supalite flood unit, surface mounted Emergency Light, Black
Construction	Polycarbonate
Mounting	Surface wall mount (hard wired supply connection)
Dimensions L x W x H	Main enclosure - 380mm x 190mm x 130mm Total height including LED Heads 310mm
Weight	3.6kg
Operating Mode	Non-maintained
Testing System	DALI Registered
Battery	2 x Lithium Nanophosphate, 6.6V 2500mAh
Charging Method	Intelligent current limited constant voltage
Lamp(s)	2 x LED Heads (adjustable), 495lm per lamp head
Operating Voltage	240V AC; 50Hz
Power Consumption	1.0 Watts (Standby), 5.4 Watts (Max)
IP Rating	IP65
Operating Temperature	0°C to 40°C
AS2293 Classification	C ₀ =N/A C ₉₀ =N/A


REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530190	BATT:L10. 6.6V 2.5Ah..2m lead.Stck.Brkt.
LCPLED-WP-18V500C-CKIT	LED Power Pack, 18V 500mA, IP Loom, L10
1100550	WP Led Head, c/w Led's & Loom
8003065	PCA: DALI Node #CT10629-Ax Horizontal


The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order



Isolux plot and value table for a 30m x 30m area serviced by a Weatherproof Supalite with each LED lamp head tilted down 30°, rolled out 30°. The Weatherproof Supalite mounted on the wall at a height of 3m and 6m (values in lux).

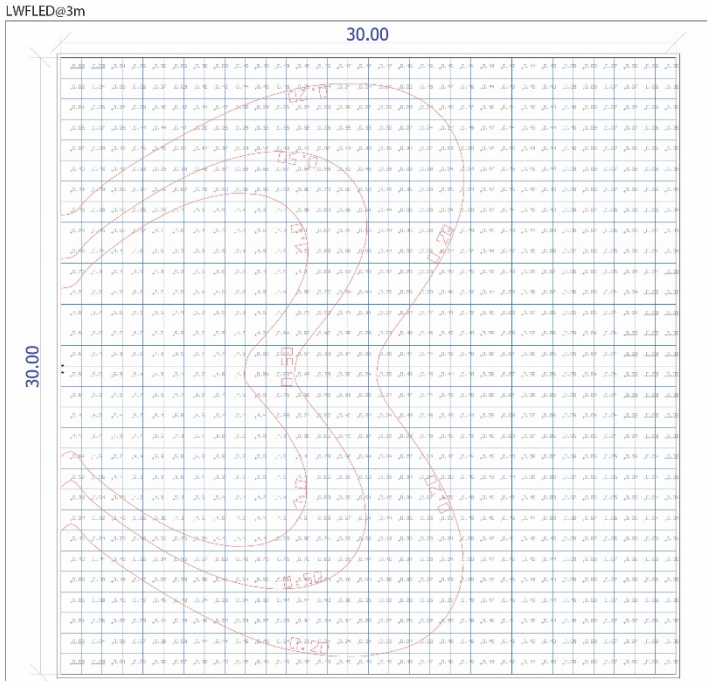

Scale: 1 : 200

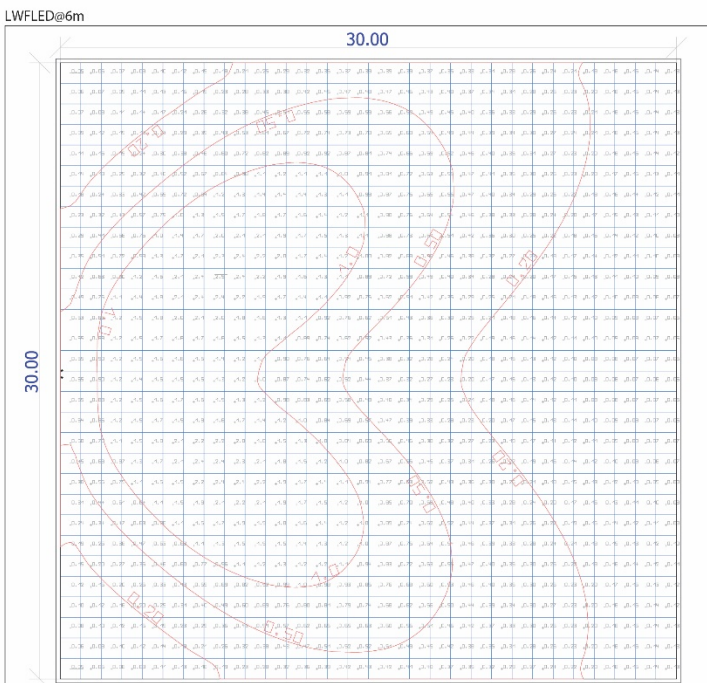

Scale: 1 : 200

